




Automation & Robotics

# DUAL SPECTROMETER

The dual stand alone Spectrometer has been designed for the light wavelength spectrum measurement by reflection from, and transmission through a lens positioned between the measurement heads. The device is not ambient light sensitive. In so doing, that system is well suited for the identification of the anti-reflective coating as well as the identification or the control of the lens colour. The software includes some advanced comparisons algorithms for checking or finding the match between the measured colour and a set of reference colours. Similar algorithms are used for the identification check of the anti-reflective coating. In the same way, there is the possibility to make a pairing check test (matching of colour between left and right lens), to calculate colour spaces coordinates and distances according to ISO and CIE standards and to measure the thickness of the varnish (assuming its index is not equal to the substrate index).


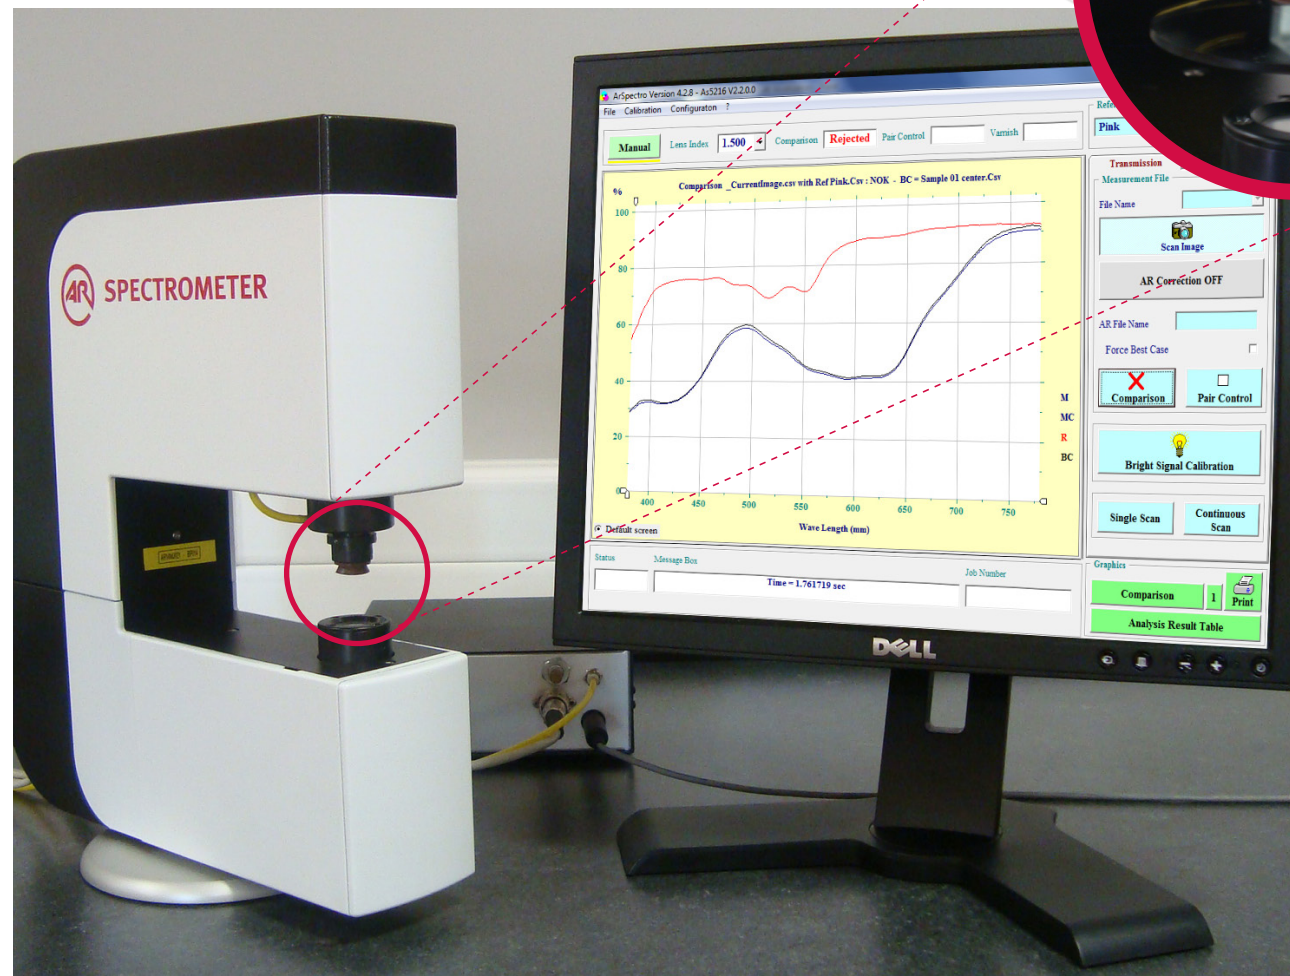


# Main Features

# Technical Specifications

# Benefits

# Options

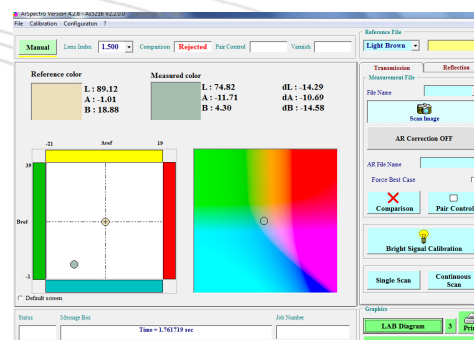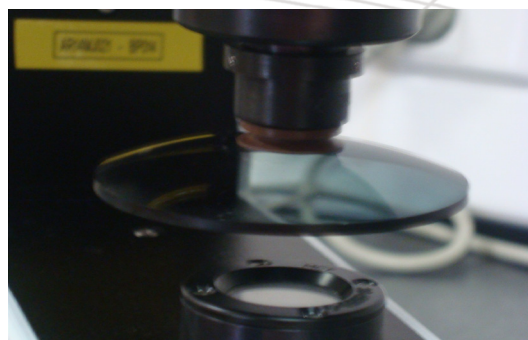

Measurement of light spectrum by transmission through the lens and/or reflection on its surfaces.

## TRANSMISSION:

- Accurate luminous transmittance measurement
- Reliable colour determination
- Accurate UV check between 380 & 400nm
- Colour space coordinates and distance calculations (Lab, Lhc, Luv, XYZ) following ISO & CIE standards
- Pairing check (L/R tolerance)
- Various displays for colouring lab assistance
- AR coating effect correction
- Specifically designed algorithms to compare complete spectrums

## REFLECTION:

- AR coating identification
- Colour spaces coordinates and distances calculations (Lab, Lhc, Luv, XYZ) following ISO & CIE standards
- Pairing check (L/R tolerance)
- Varnish detection and thickness measurement

Type : SPECTRO (Machine & stand-alone version)

## Outputs:

Measured spectrum, colour coordinates & distances, solar transmittance, tolerance check, local transmission value (UV check), varnish thickness, etc.

## Samples:

- All lenses type, polar, photochromic
- Organic & mineral
- -12 D to +12 D (extensible)

Spectral range: 380 to 780nm  
Spectral resolution: 1nm  
Spectral accuracy: < 0.1nm  
Measurement accuracy: < +/-0.2%  
Reproducibility: < +/-0.1%  
Measurement time: < 2sec  
Measurement area (Refl.): < 1mm<sup>2</sup>  
Measurement area (Trans.): some mm<sup>2</sup>

Power : 200 W - 230Vac +/-15% - 50-60Hz\*  
\* compatible for non -European power supply on request

- Not ambient light sensitive
- Independent to the lens optical power
- Quick measurement
- High accuracy & reproducibility
- Easy calibration
- Easy tolerance setting, independent for every check (colour, pairing, a.r.,...)
- Use of proprietary advanced comparison algorithms taking the complete curve for colour and a.r. coating control into account
- Colouring Lab assistance display
- User-friendly
- Without contact

- PC with pre-installed software for stand-alone unit
- Spectrometer by Transmission or Reflection
- Spectrometer by Transmission + Reflection

The sale of all of Automation & Robotics products is subject to the company's applicable Warranty and Limitations of Warranty and to the company's Standard Terms and Conditions of Sale.

Parc industriel de Lambermont  
Rue des Ormes 111  
B-4800 Verviers - Belgium

Tél.: +32 (0)87 322 323  
Fax: +32 (0)87 310 406  
e-mail: aut-rob@ar.be

T.V.A.: BE 0423.637.107  
R.P.M.: Verviers  
www.ar.be

